National Aeronautics and Space Administration

Quiet SuperSonic Technology (QueSST) Aircraft Preliminary Design Status and Low-Boom Flight Demonstration (LBFD) Project Update

David Richwine, DPM for Technology
Jay Brandon, Chief Engineer

AIAA SciTech 2018
APA-11 Low-Boom Activities
Kissimmee, FL

January 2018

Credit: Lockheed Martin Corporation

Outline

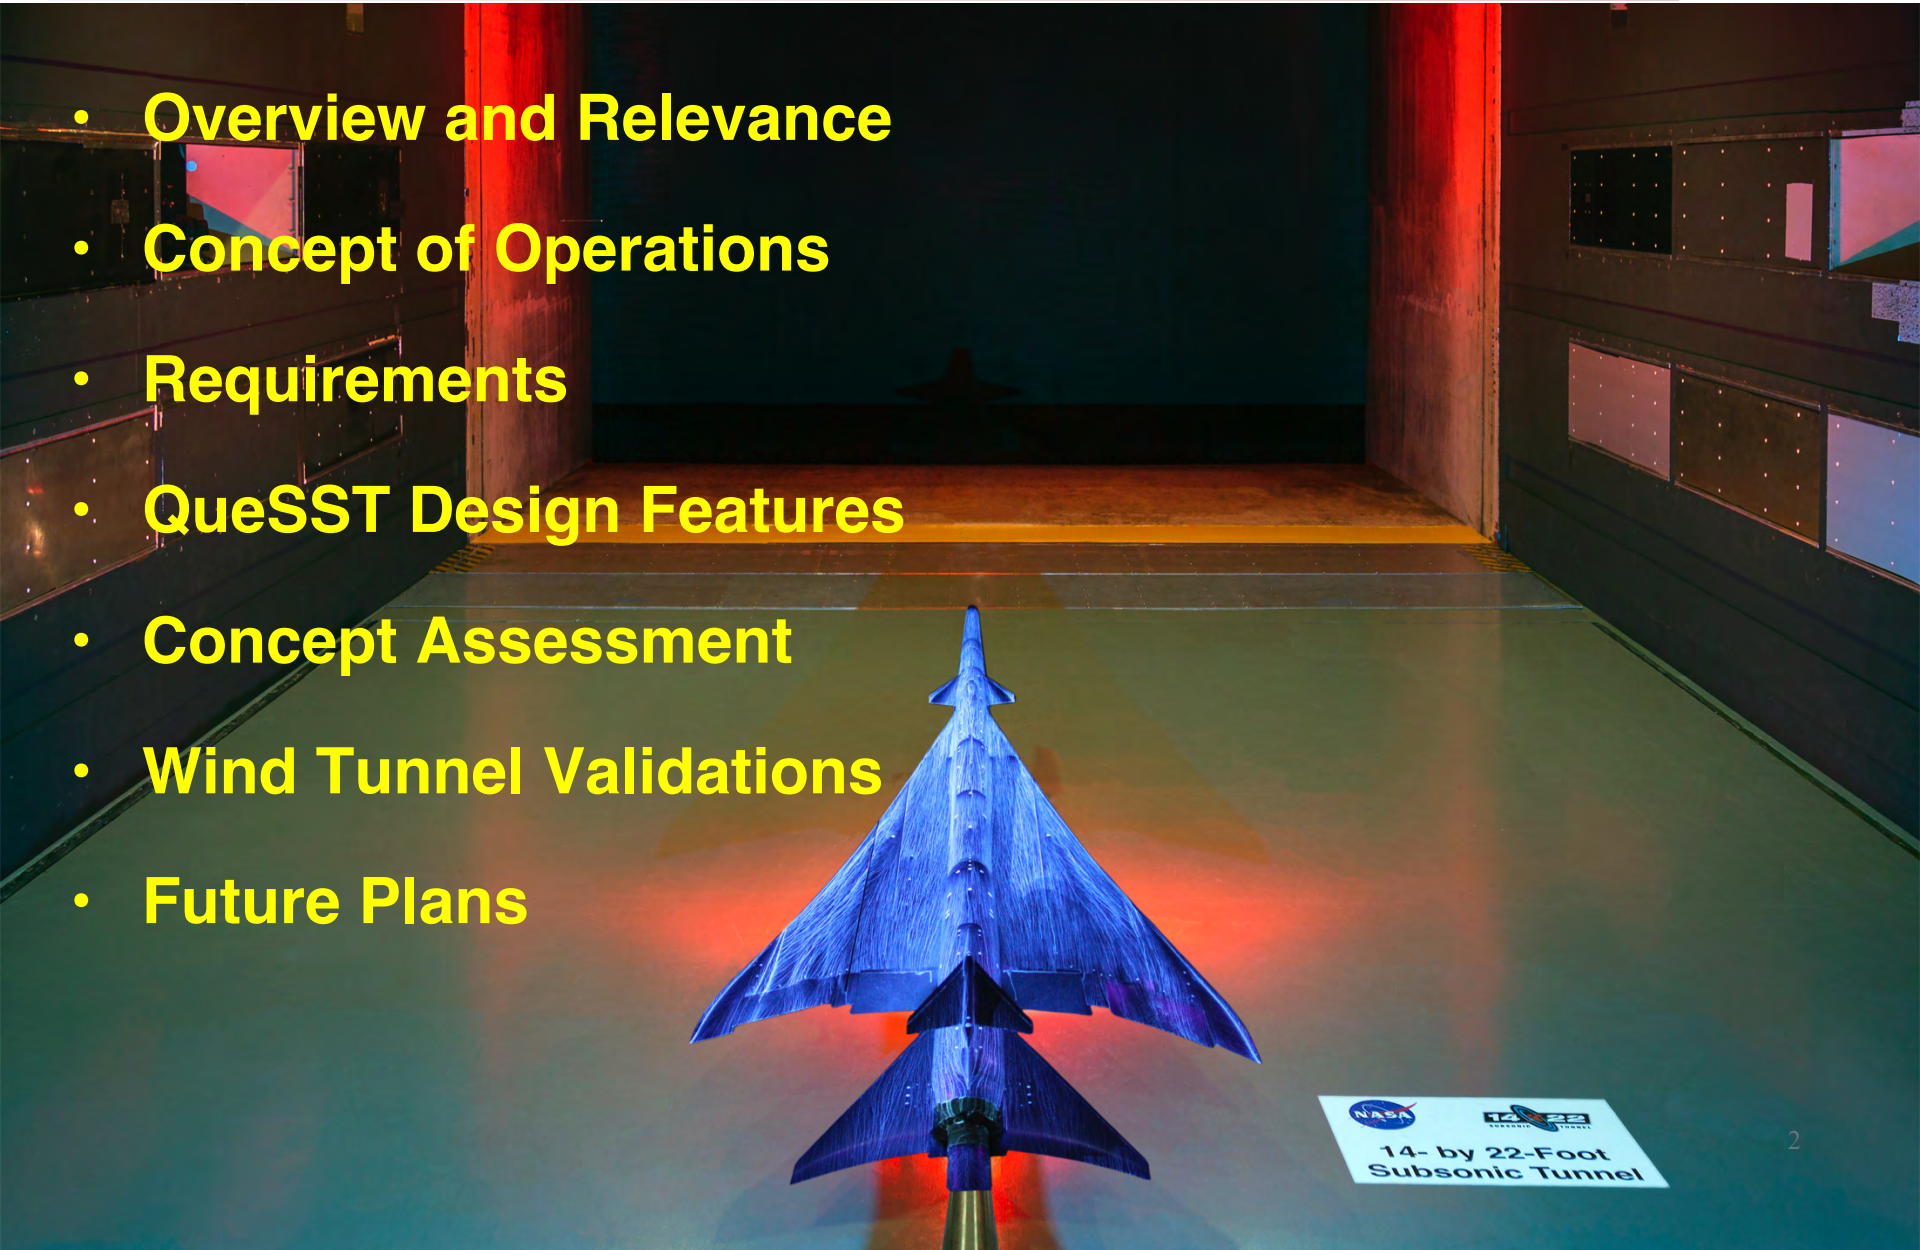

- Overview and Relevance
- Concept of Operations
- Requirements
- QueSST Design Features
- Concept Assessment
- Wind Tunnel Validations
- Future Plans

Innovation in Commercial Supersonic Flight

Why?: Commercial supersonic flight represents a potentially large new market for aircraft manufacturers and operators world-wide

- Global demand for air travel is growing, which places a demand on speed

- Supersonic aircraft will be excellent export products that can be capitalized on by the US to support a positive balance of trade

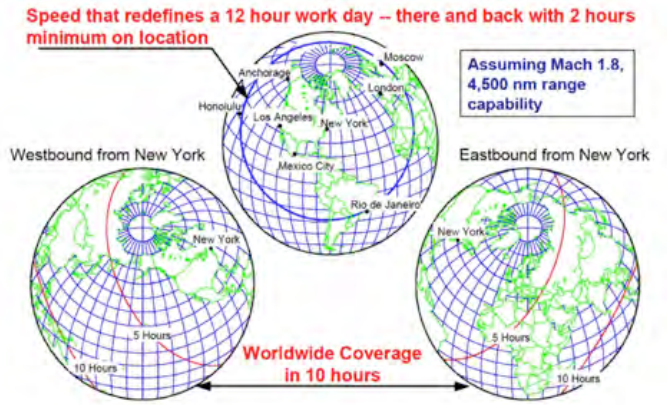

- New supersonic products lead to more high-quality jobs in the US
  - Large potential market predicted: - business aircraft followed by larger commercial aircraft
  - Technology leadership established through initial products will lead to development of larger, more capable airliners

- The government plays a central role in developing the data needed for regulation change that is essential to enabling this new capability

Barriers to Commercial Supersonic Flight: Sonic Boom Noise and Overland Flight Prohibitions

- Planned introduction of supersonic commercial transports in 1970's brought the problem of sonic boom noise to public attention
- Community overflight tests in the US and elsewhere showed sonic boom noise to be unacceptable
- Supersonic overflight restrictions followed
  - US: FAA Regulation (FAR) prohibits supersonic flight over US
  - Worldwide: ICAO Assembly Resolution – "No unacceptable situation for the public due to sonic boom"
- Restriction dramatically limited market potential for supersonic commercial aircraft

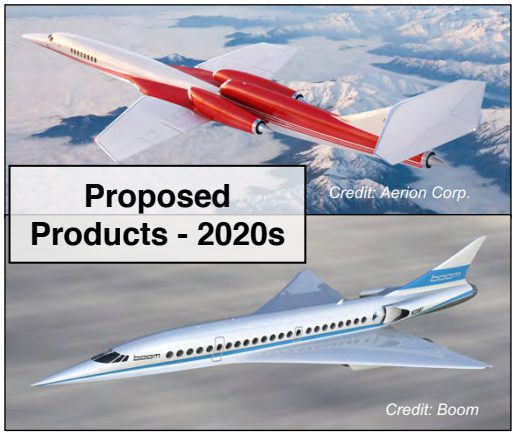

- The vision of the Supersonics Community is a future where fast air travel is available for a broad spectrum of the traveling public.
- Future supersonic aircraft must be able to fly overland without creating an "unacceptable situation" and compared to Concorde, be efficient & green
- The creation of overland certification requirements based on acceptable noise levels will enable this vision

Background and Overview

Overcome the sonic boom barrier and open the door for development of a new generation of environment-friendly supersonic civil transport aircraft

Overall Requirement

- Demonstrate that noise from sonic booms can be reduced to a level acceptable to the population residing under future supersonic flight paths
- Create a community response database that supports an International effort to develop a noise based rule for supersonic overflight

Approach

- Partner with regulatory agencies and communities to create a roadmap for community response study and rule development – with Commercial Supersonic Technology (CST) Project in Phase 3
- Revitalize the excitement of manned X-Planes using a focused and cost-effective approach to design and operate a low boom research aircraft
- Partner with industry and OGAs to formulate, obtain approval and execute

Roles - Supersonic Overland Flight

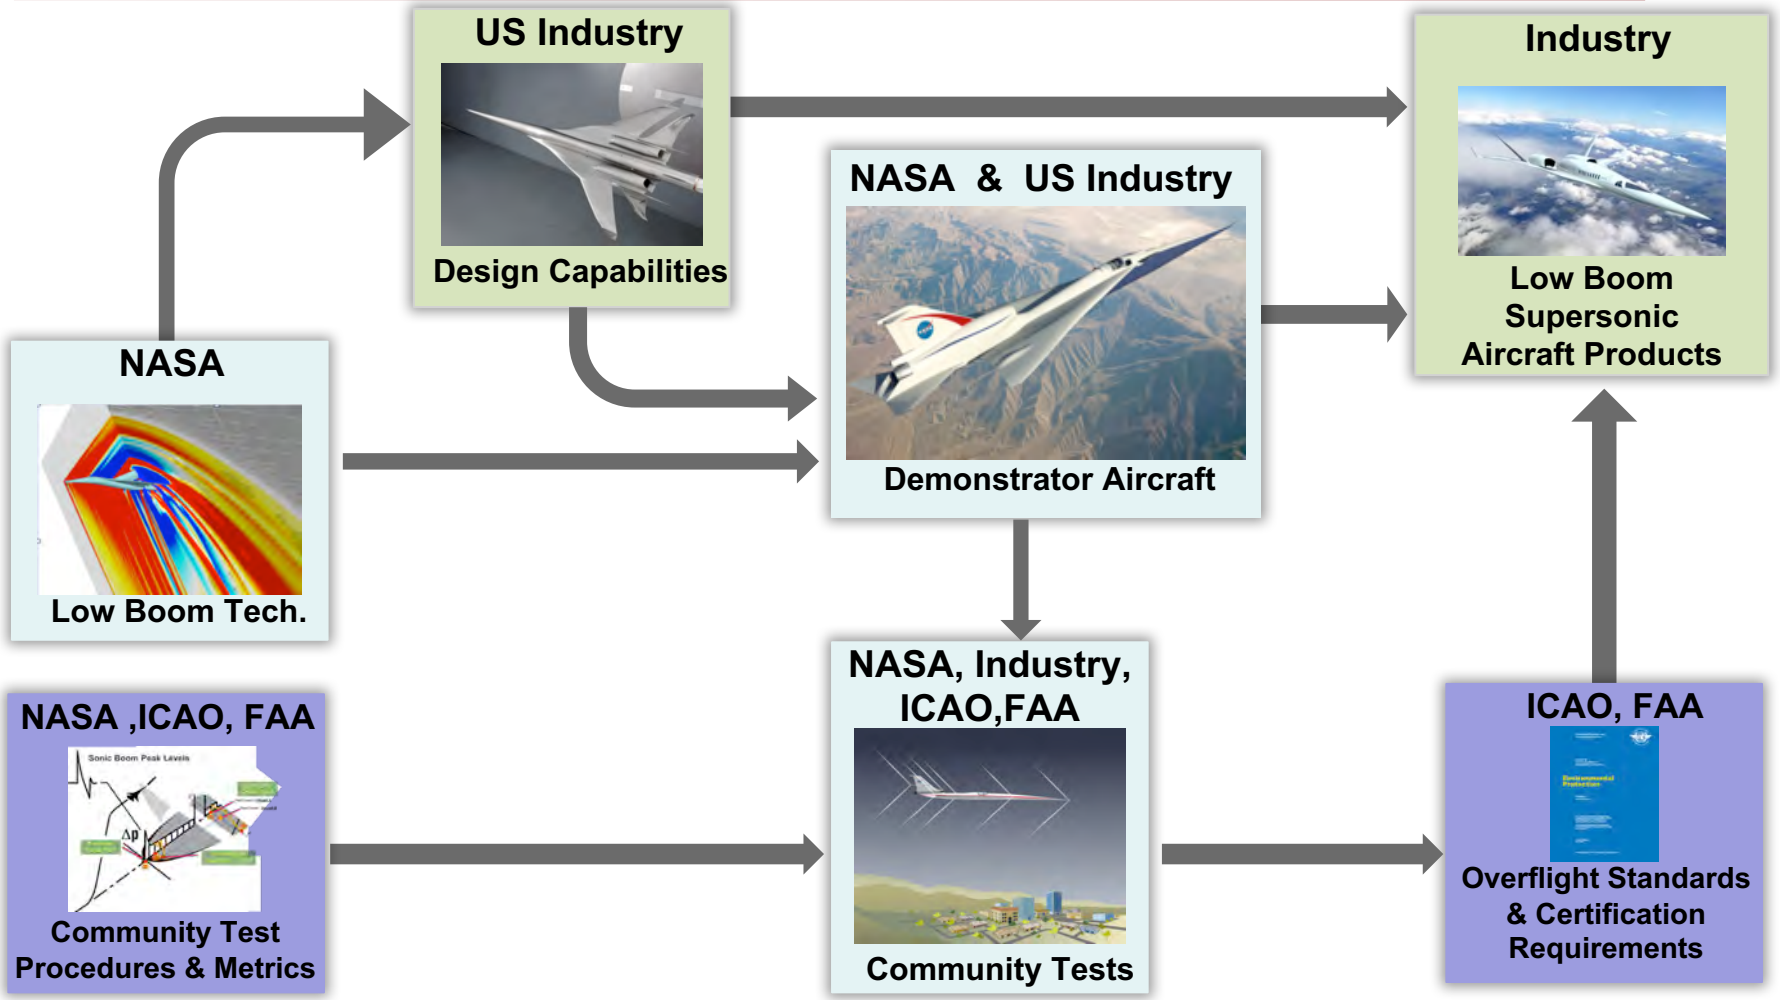

- NASA has invested in supersonic tools and technologies in partnership with US industry
- Unique NASA role in development of demonstrator
- NASA leadership provides the key data required to determine certification standards for supersonic overland flight

History – Formulation and Concept Studies



FY13	FY14	FY15	FY16	FY17	FY18

Concept Development

Pre-Phase A
Concept Studies

Phase A
Concept & Technology Development

Phase B
PD & Technology Completion

Concept Formulation Studies (CFS)

KDP A/B

*Mission Concept Review (**MCR**)*

*Mission Design Review (**MDR**)*

LBFD Concept Refinement Studies (CRS)

Systems Requirements & Design Review (SRDR)

Preliminary Design Complete

QueSST Preliminary Design

Aircraft Systems Requirements Review (ASRR)

Preliminary Design Review (PDR)

LBFD Project

MCR	9/2013
MDR	3/2014
SRDR	9/2015
ASRR	6/2016
KDP A/B	8/2016
PDR	**6/2017**
PD Comp.	2/2018

Quiet SuperSonic Technology (QueSST) preliminary design has built a solid technical foundation moving forward with the Low-Boom Flight Demonstration (LBFD)

Sonic Boom 101

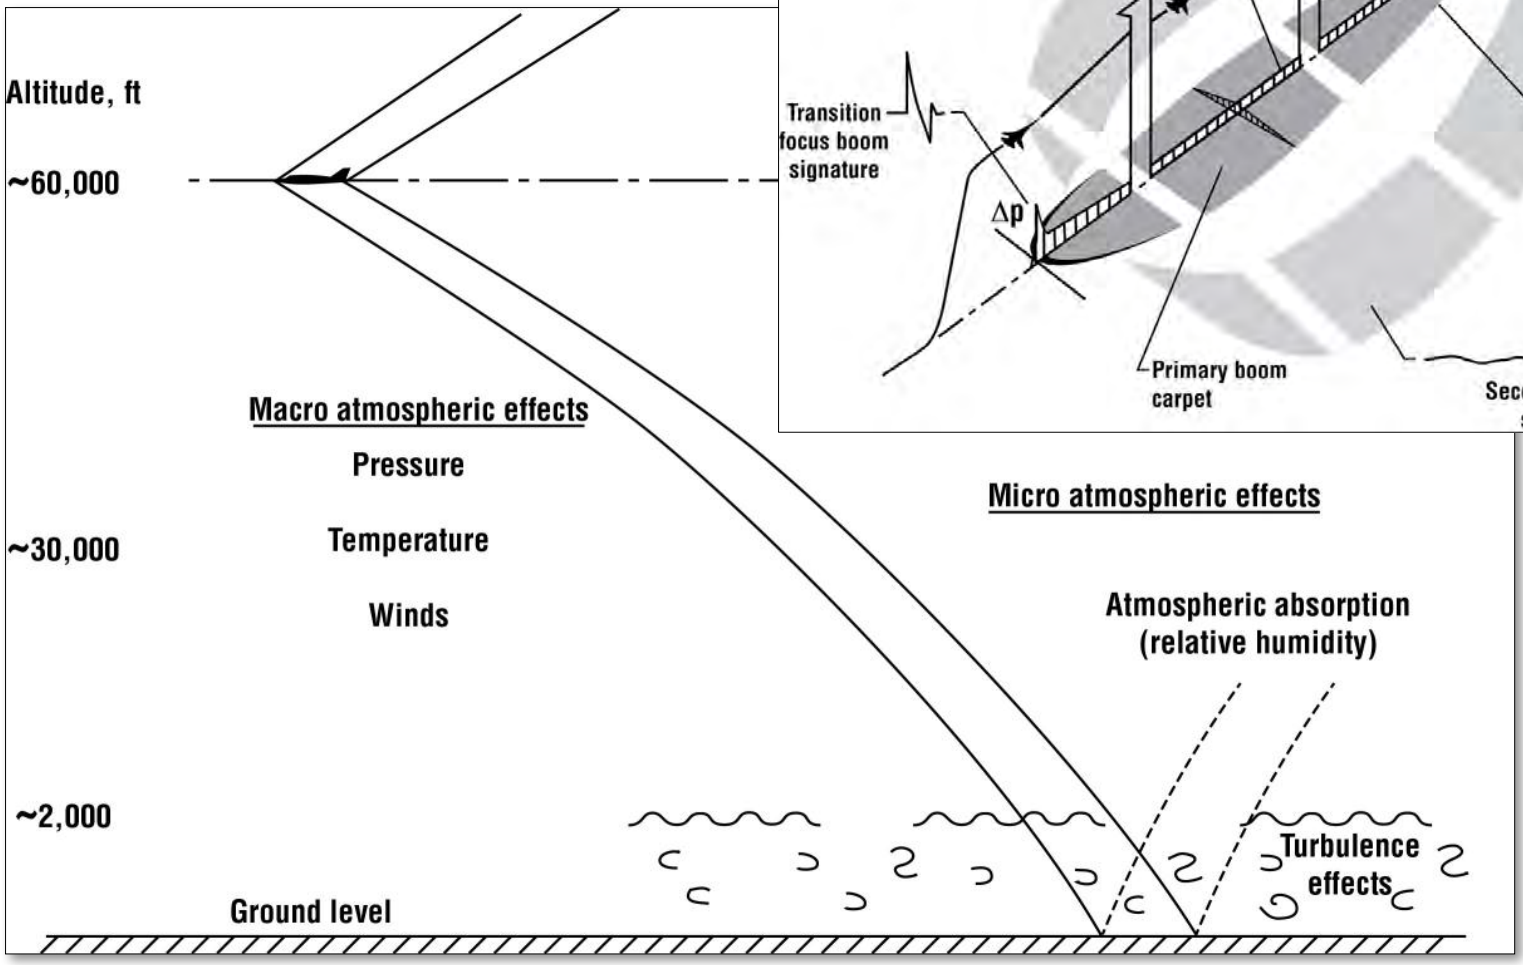

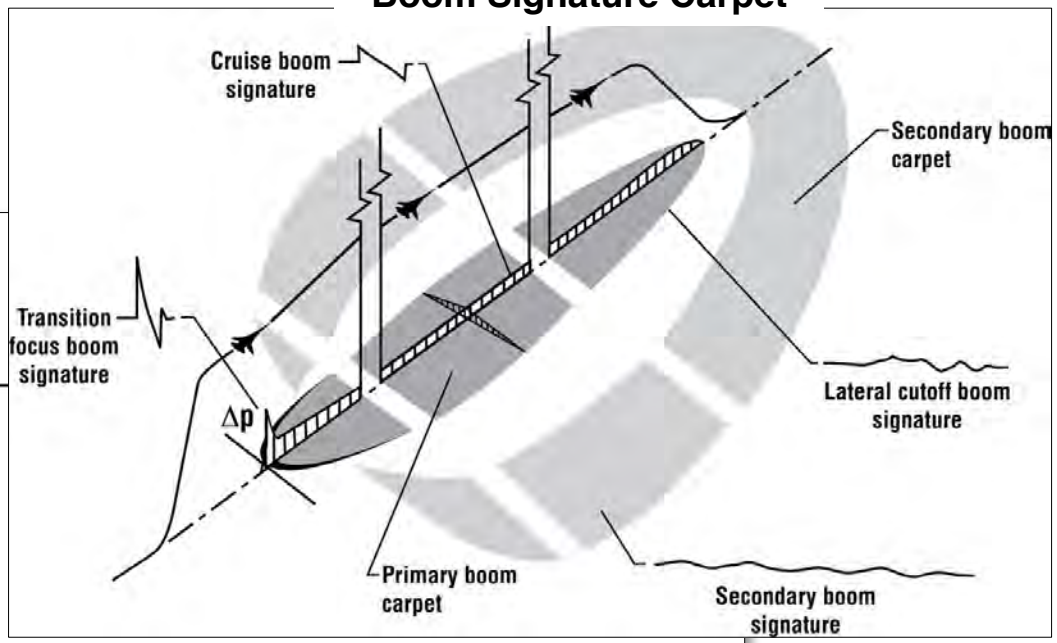

Concept of Operations

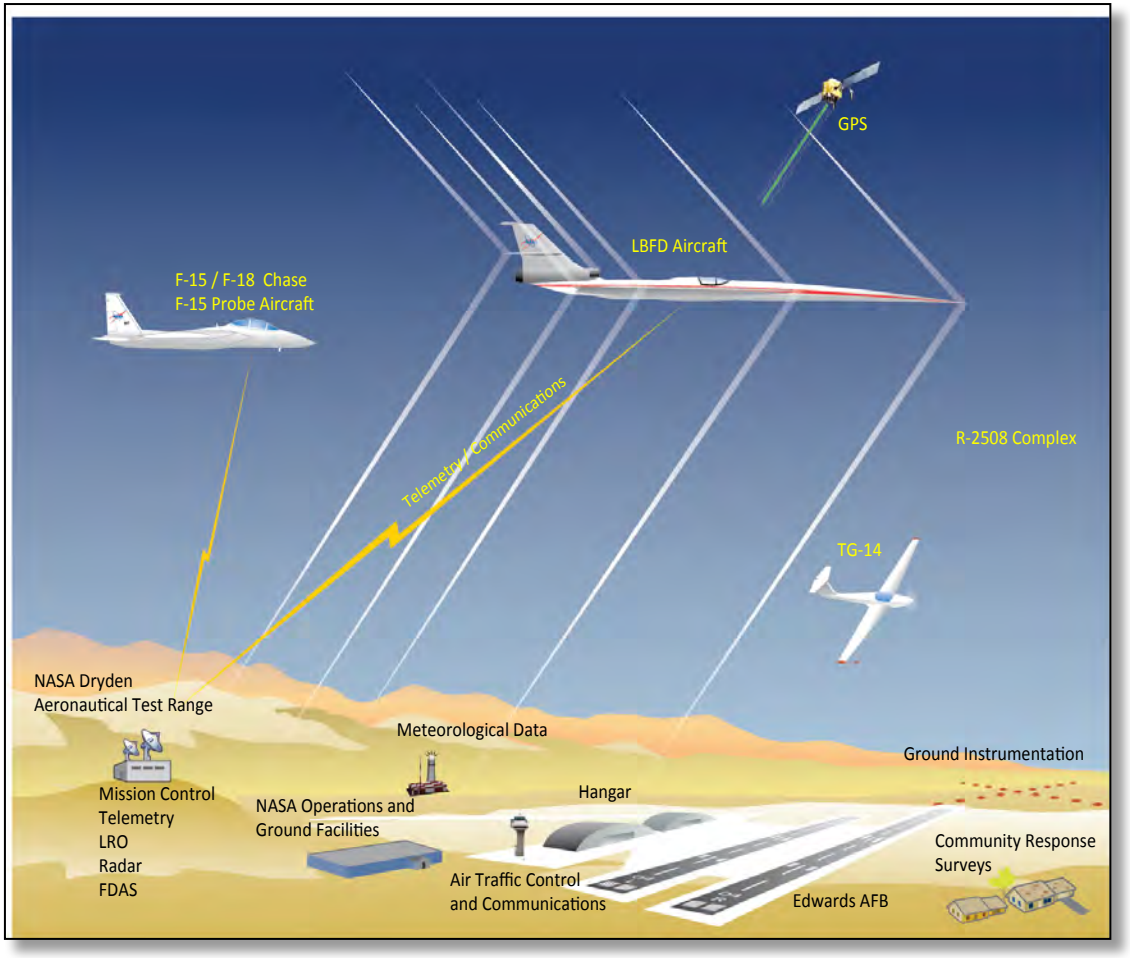

Project Phases

Concept Studies

QueSST Preliminary Design

Phase 1 - Aircraft Development (LBFD)
- Detailed Design
- Fabrication, Integration, Ground Test
- Checkout Flights
- Subsonic Envelope Expansion
- Supersonic Envelope Expansion

Phase 2 – Acoustic Validation
- Aircraft Operations / Facilities (LBFD)
- Research Measurements (CST)

Proposed follow-on under CST

Phase 3 – Community Response
- Initial community response overflight study
- Multiple campaigns (4 to 6) over representative communities and weather across the U.S.

Mission Requirements

Key Mission Requirements
Ground signature traceability (indoor) - with peak acoustic energy ≤ 10 Hz
Ground signature loudness (outdoor) ≤ 75 PLdB throughout boom carpet
Ground signature variability 70 - 80 PLdB
Cruise deviations (turbulence) - ground signature ≤ 76 PLdB and ≤ 1.4 PLdB RMS
Cruise Mach ≥ 1.4
Two passes ≥ 50 nm in length per flight, passes ≥ 20 minutes apart
Three flight operations / day
Day and night flight operations in the public airspace
IFR flight operations
Forward visibility (see-to-avoid/land)
Low/no-focus supersonic acceleration/climb performance
Mission performance (hot day)
Potential for alternate fuels

QueSST Aircraft Preliminary Design Overview

Design provides a cost-effective solution to meet the low-boom design requirements, NASA-Provided Flight Systems and GFE are leveraged to enhance aircraft capabilities and provide key value added opportunities

eXternal Vision System (XVS)

XVS - enabling technology - combination of Ultra-High -Definition (UHD) sensor, display, and image processing technologies to provide visibility of the external scene for the flight crew and comparable to forward-facing windows in conventional aircraft

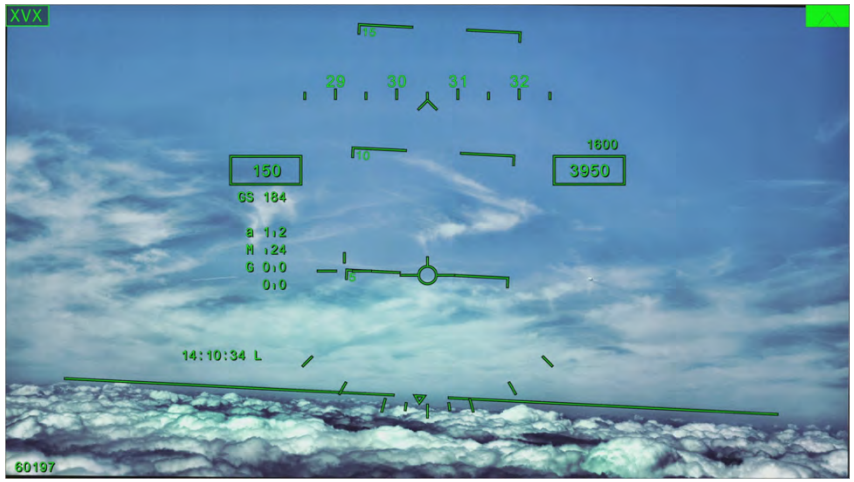

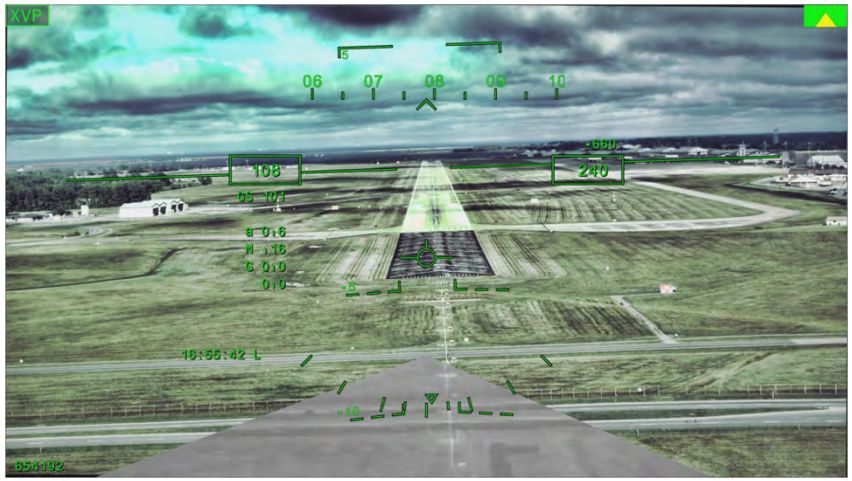

Concept Assessments

Sonic Boom

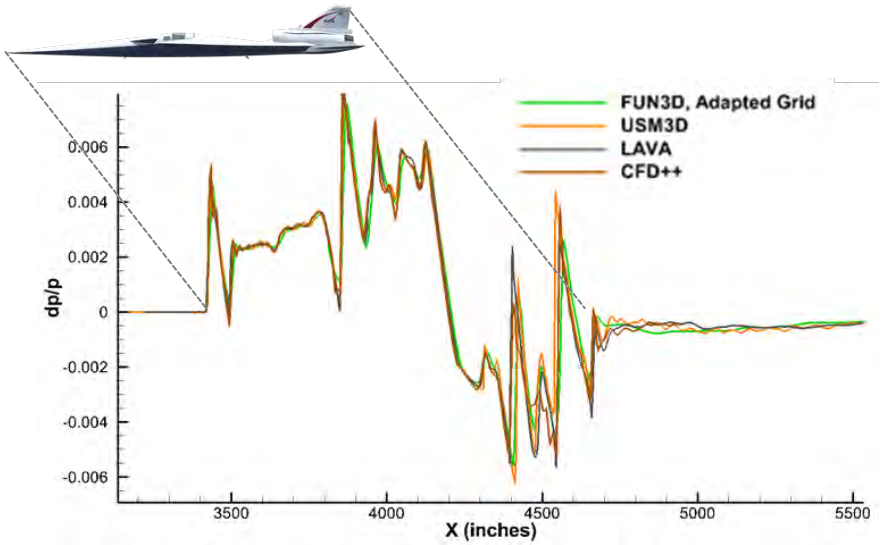

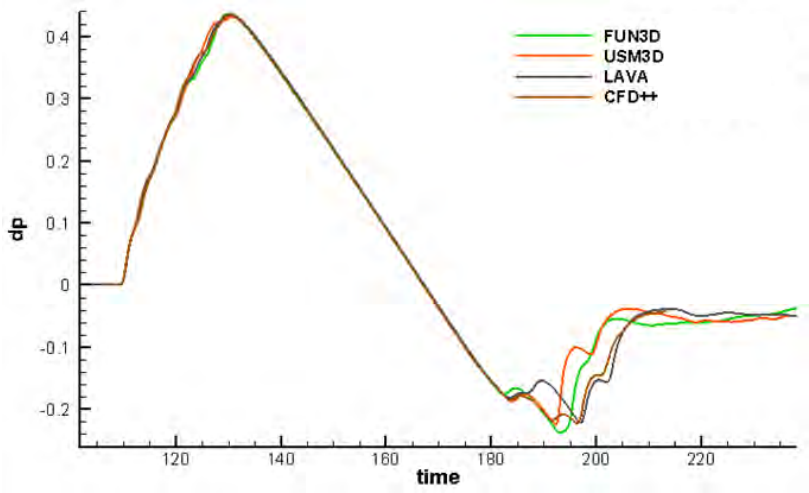

Aerodynamic Performance

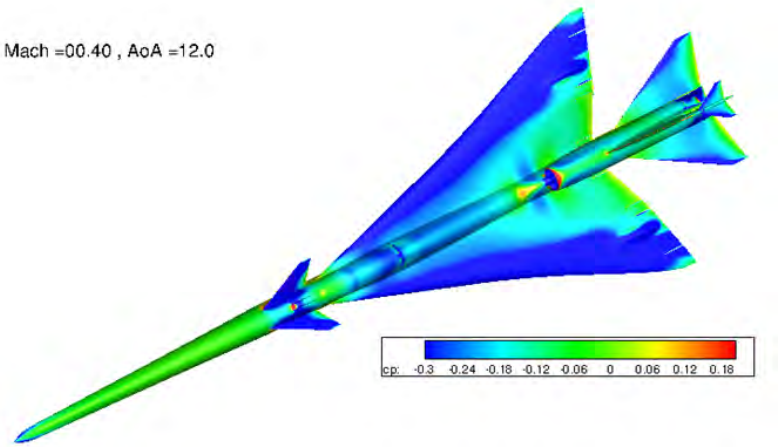

Handling Qualities

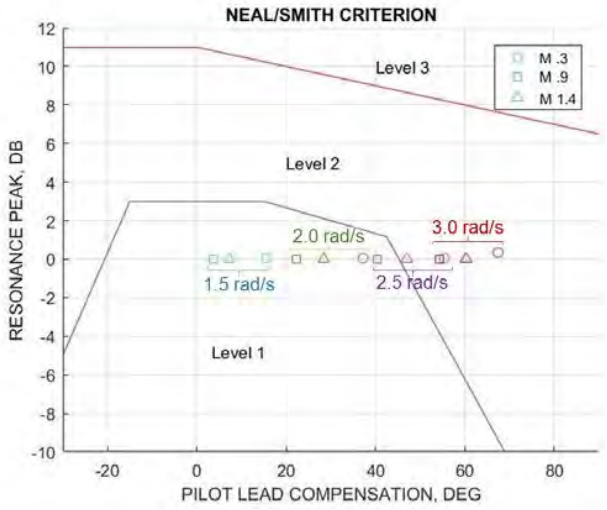

Other Concept Assessments

Inlet Flow / Vortex Generators

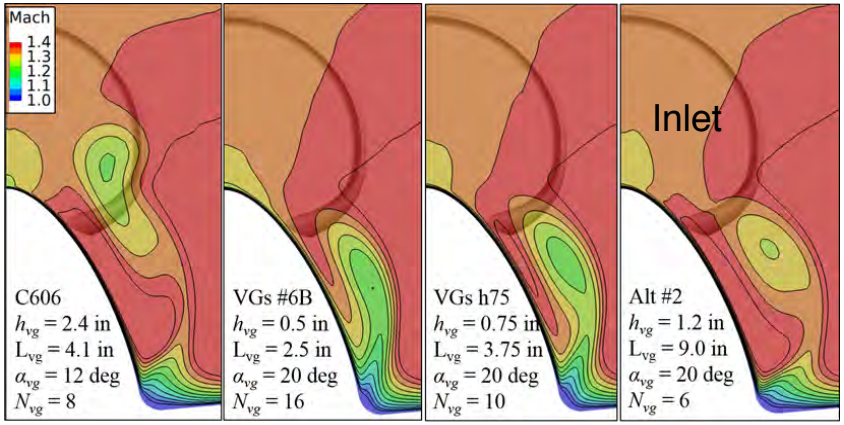

Structural Modeling

C607 Finite Element Model

Trade Studies (Brake vs Drag Chute)

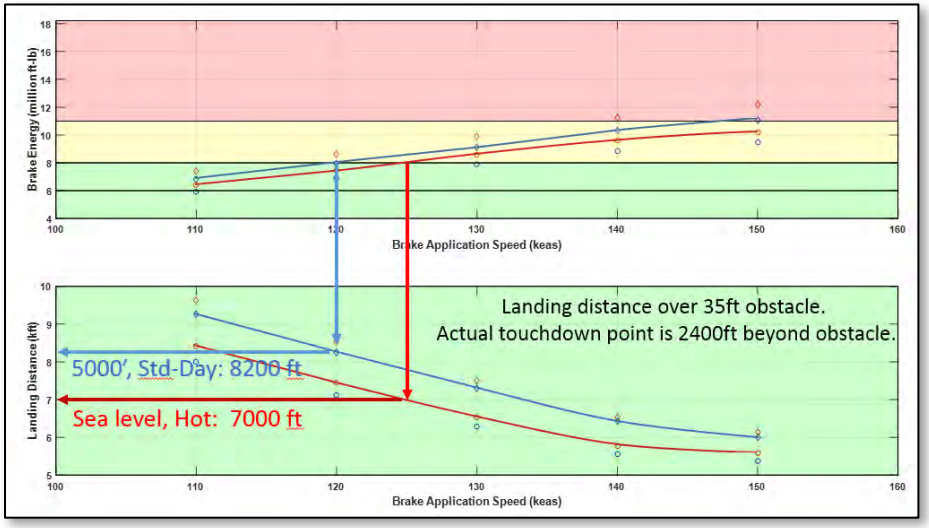

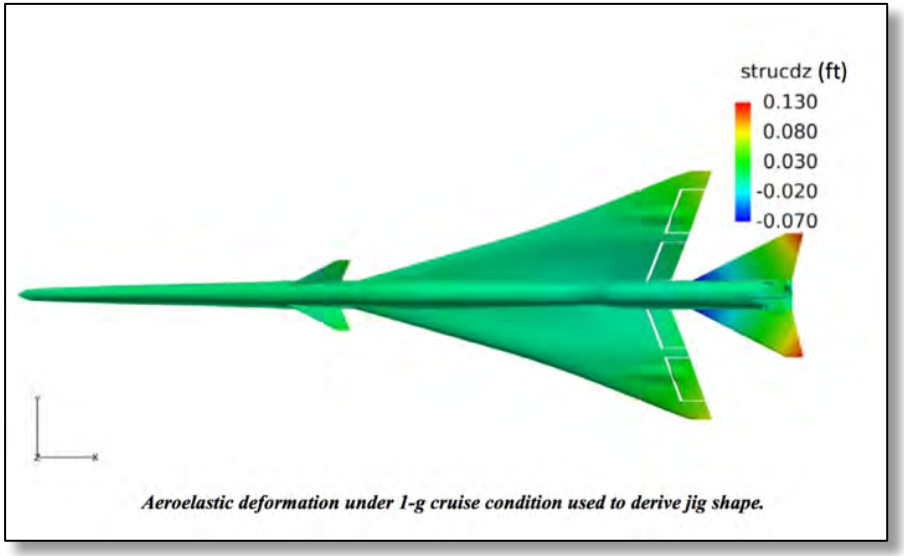

Aeroelastic deformation under 1-g cruise condition used to derive jig shape.

Wind Tunnel Validations

Low-and high-speed Aerodynamic and Propulsion Airframe Interaction (PAI) wind-tunnel tests to validate predictions/data and ensure readiness of the QueSST Preliminary Design

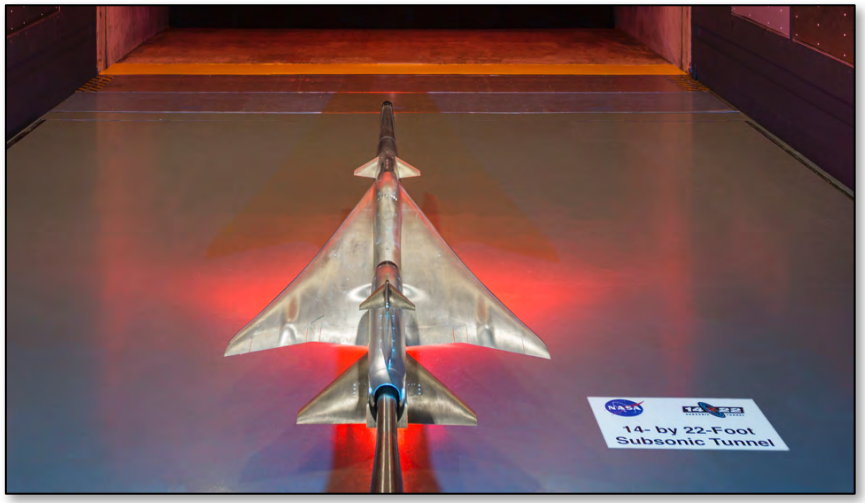

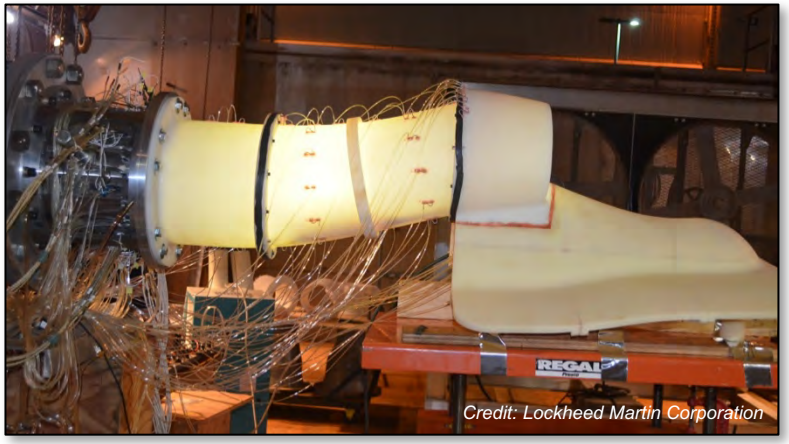

LBFD – Future Plans

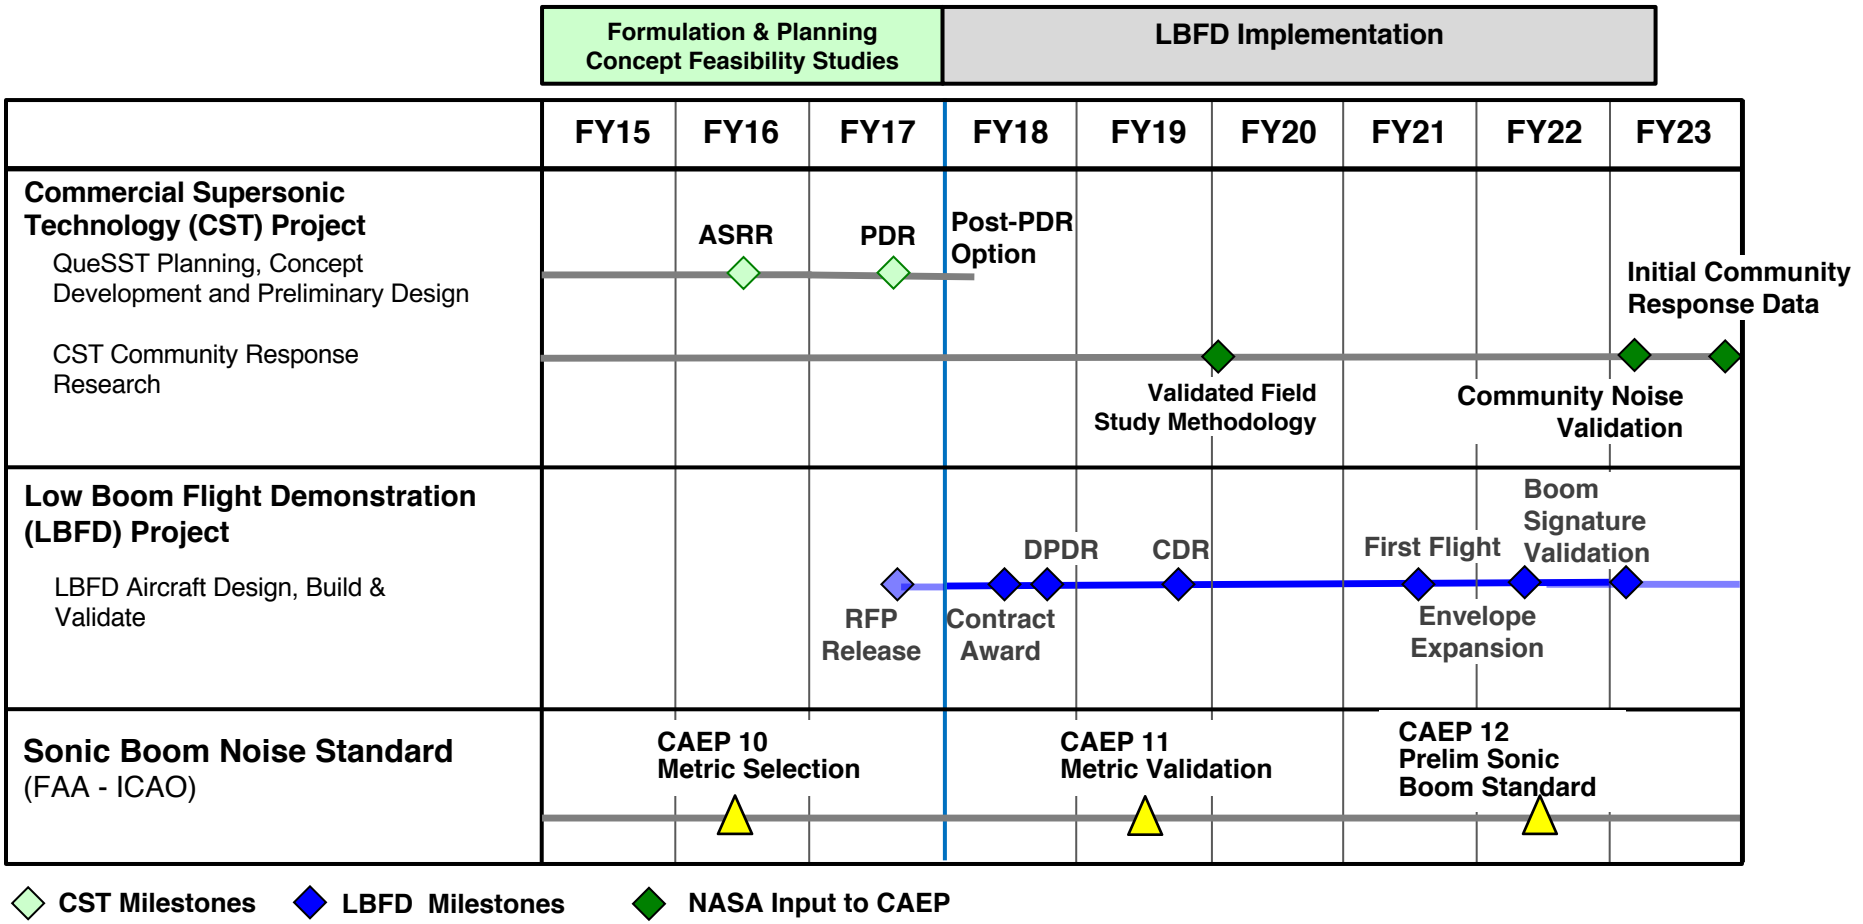

CAEP – Committee on Aviation and Environmental Protection
ICAO – International Civil Aviation Organization
ASRR – Aircraft Systems Requirement Review


Any Questions?
14- by 22-Foot
Subsonic Tunnel